


The Hall How well to seven the safe to the train that to the safe that the train in the train safe that the train to the train the train that the train train to the train tra

The OC3 PPM pack supports 8 bi-directional OC-3 signals that may alternatively support OC3c Packet Over SONET (POS), OC3c IP/ATM, or OC3 IP/ATM/DS3 tributaries. These facilities may be in a 1+1 protection arrangement (as

The specifies the number of EMS links from the shelf. It does not address the number of EMS system that can talk to the

shown) or simplex.

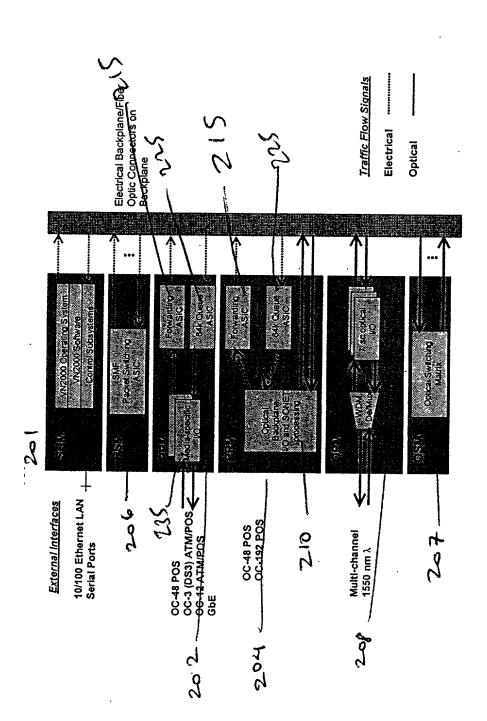

F16. 2

